

1. RACK MOUNTED ALUMINUM CHASSIS, BLACK MEDIUM TEXTURE
 1727.2 mm LENGTH
 55 mm WIDTH
 65 mm DEPTH (OUTLET SECTION)
 113 mm DEPTH (BREAKER SECTION)

2. INPUT: 200-240V 32A 1-PHASE, 50/60 Hz
 CABLE: 3m LENGTH

3. OUTPUT: 200-240V, 50/60 Hz
 10A AT 20 IEC C13 RECEPTACLES (A1~A8, A11~A12, B1~B2, B5~B12)
 16A AT 4 IEC C19 RECEPTACLES (A9~A10, B3~B4)

4. BREAKERS: 2 SINGLE-POLE 16A

5. CURRENT METER :
 LOCAL & GUI DISPLAY
 ACCESSIBLE VIA ETHERNET (RJ45 PORT) INTERFACES:
 WEB (HTTP)
 SNMP
 SMTP (E-MAIL NOTIFICATION)
 ACCURACY: 1.5% FROM 0.4A TO 2A AND 1% FROM 2A TO 10A
 RESOLUTION:
 <10A : ±0.001A
 ≥10A : ±0.01A
 RANGE: 0.4A~10A

6. TEMPERATURE AND HUMIDITY SENSORS (EMP001):
 TEMPERATURE: ONE FOR INTERNAL AND THE OTHER FOR EXTERNAL MEASUREMENT
 ACCESSIBLE VIA ETHERNET (RJ45 PORT)
 RANGE: 0°C TO 65°C
 HUMIDITY: ONE FOR EXTERNAL MEASUREMENT
 ACCESSIBLE VIA ETHERNET (RJ45 PORT)
 RANGE: 20% TO 90%


7. OUTLET LED INDICATOR :
 ON: OUTLET IS POWERED
 OFF: OUTLET IS UNPOWERED
 BLINKING: CRITICAL ALARM

8. OPTIONAL KITS:
 KIT1: EMP001 (744-A1576-00P)
 KIT2: KBLT01(744-A1419-00P)

9. SPARE PARTS:
 PART1: SPK001(744-A1418-00P)
 PART2: SPK003(744-A1582-00P)
 PART3: SPK002(744-A1581-00P)

10. RoHS COMPLIANT PER DIRECTIVE 2011/65/EC
 WITH APPLICABLE EXEMPTIONS
 REACH COMPLIANCE

11. GW: 8.1KG NW: 5.91KG

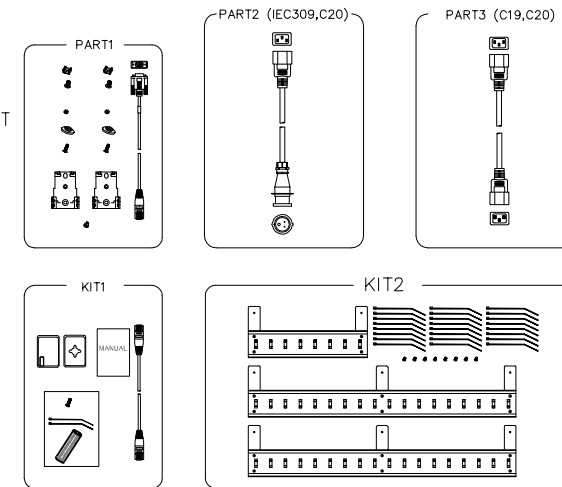

TITLE	EATON ePDU OUTLINE DRAWING	DRAW	
CATALOG NO.	eSWA04	DESIGN	
MANUF No.	9001-22069	CHECKED	
COATING	POWDER COATING	SAFETY	
UNITS	mm	APPROVED	
SHEET	1/1		